



5-Band Bass Equalizer Pedal

Owner's Manual

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V (+/-10%) DC, center minus. The maximum working voltage shall not exceed 12V, otherwise may be dangerous equipment damage, fire or other problems.

Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will help prevent malfunction and / or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper, metallic, or other objects into this unit.

Take care not to drop the unit, and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth.

Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location


To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Magnetic fields
- Excessive dusty or dirty location
- Strong vibrations or shocks
- Heat sources
- Extreme temperature or humidity
- High humidity or moisture

Main Features

- Smallest Bass graphic equalizer pedal in the world
- 5-Band Graphic EQ with master level control
- ±18dB adjustable gain range per band
- Full metal shell
- Very small and exquisite
- True bypass
- DC 9V Adapter power supply

Panel Instruction

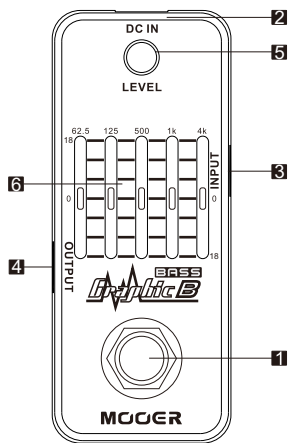

- 1. TRUE BYPASS Footswitch:**
Push down the footswitch to switch between effects and bypass status.
- 2. DC IN Power Jack:**
For power supply, use a 9-volt DC regulated AC adapter (plug polarity is positive on the barrel and negative in the center).
- 3. INPUT Jack:**
1/4" mono audio jack, for connecting bass.
- 4. OUTPUT Jack:**
1/4" mono audio jack, outputs the signal.
- 5. LEVEL Knob and ON/OFF LED:**
Adjust the level of output, and instructs effects or bypass status of Graphic B, when the LED is lit up, the effects is on.
- 6. 5-band Slider:**
Adjust the level of each frequency band (-18dB~+18dB).

Specification

- Frequency Centers:** 62.5Hz, 125Hz, 500Hz, 1kHz, 4kHz
- Input:** 1/4" monaural jack (impedance: 470k Ohms)
- Output:** 1/4" monaural jack (impedance: 1k Ohms)
- Power Requirements:** AC adapter 9V DC (center minus plug)
- Current Draw:** 5 mA
- Dimensions:** 93.5mm (D) x 42mm (W) x 52mm (H)
- Weight:** 160g
- Accessories:** Owner's Manual

** Disclaimer: Any specification's update won't be amended in this manual.*

MOGER

Graphic B

5段贝斯均衡单块

用户手册

注意事项

使用前请仔细阅读

电源供应

请使用正确的交流电源插座连接电源变压器。
 请使用内负外正的9V(+/-10%)电源变压器，最大工作电压不得超过12V，否则将会导致设备损坏，着火或者其他问题。
 不使用时或雷雨天时请拔下电源。

连接

连接设备或断开连接前，请务必关闭电源及其它设备，这将有助于避免故障和损坏其它设备。另外，要确保移动本机前断开所有的连接线和电源线。

放置场所

为防止变形、变色，及其它严重损坏，请避免以下情况：

- 阳光直射
- 磁场
- 多尘或不洁的地方
- 强烈震动或摇晃
- 热源
- 高温潮湿
- 湿度较大

电静干扰

在使用本机时，收音机和电视机可能会造成干扰。使用本机时要远离收音机和电视机。

清洁

请用于干燥柔软的布清洁本机。如有必要，可用稍微湿润的布。切勿使用粗糙的清洁粉、酒精、涂料稀释剂、蜡、溶剂、清洁剂及化学试剂等浸渍抹布。


操作

请勿用蛮力使用开关及控制元件。
 请勿让纸屑、金属制品及其它物体落入机内。
 注意不要掉落，不要使其受到冲击及过度压力。

性能概述

- 目前世界最小的贝斯图示均衡单块
- 5段图示均衡，带总增益调节
- $\pm 18\text{dB}$ 可调节增益范围
- 全金属外壳
- 外观小巧精致
- 纯直通设计
- 9V电源供电

面板说明

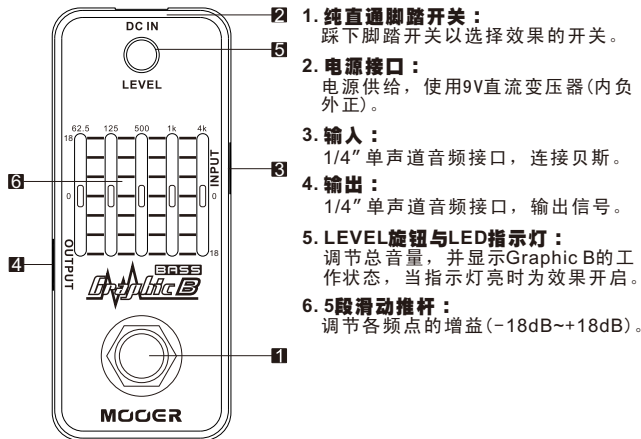

1. **纯直通脚踏开关：**
 踩下脚踏开关以选择效果的开关。
2. **电源接口：**
 电源供给，使用9V直流变压器(内负外正)。
3. **输入：**
 1/4" 单声道音频接口，连接贝斯。
4. **输出：**
 1/4" 单声道音频接口，输出信号。
5. **LEVEL旋钮与LED指示灯：**
 调节总音量，并显示Graphic B的工作状态，当指示灯亮时为效果开启。
6. **5段滑动推杆：**
 调节各频点的增益(-18dB~+18dB)。

技术参数

- 频点：** 62.5Hz, 125Hz, 500Hz, 1kHz, 4kHz
输入： 1/4" 单声道音频接口(阻抗: 470k Ohms)
输出： 1/4" 单声道音频接口(阻抗: 1k Ohms)
电源供给： 9V 直流变压器(内负外正)
工作电流： 5 mA
尺寸： 93.5mm (D) × 42mm (W) × 52mm (H)
重量： 160g
附件： 用户手册

*免责声明：参数更新恕不另行通知。